




## SM600 MANUAL CASSETTE STEP

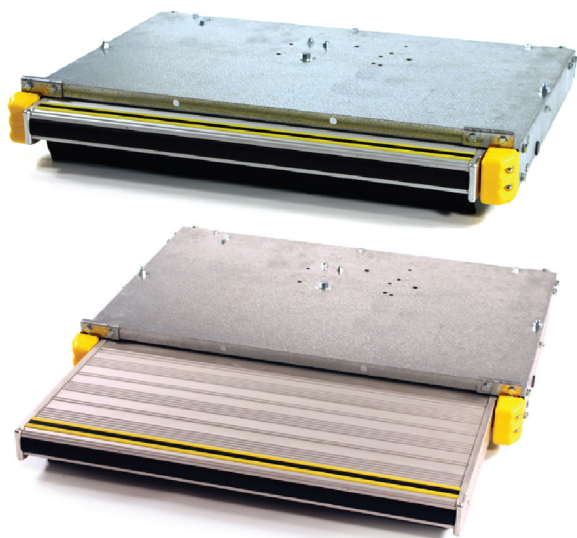

### Dimensions

Tread size deployed: 300mm x 610mm  
Tread deployment movement: 245mm  
Minimum projection of case below sill height: 65mm  
Case depth behind sill lip: 470mm  
Closed tread projection out from sill lip: 55mm  
Overall width of case: 688mm

### Standard Equipment

Extruded Anodised Aluminium ribbed tread profile  
High grip Yellow and Black Rubber Strip to tread top edge  
Soft Rubber Cushion Strip to leading edge of tread  
Extruded Anodised Aluminium Side arms  
Rubber Weather Flap to underside of Tread  
High visibility corner mouldings  
Damped gas spring activation  
Galvanised Steel Case  
Stainless Steel Rails  
Nylon Rollers  
Over-centre latch mechanism  
Patented deployed lock mechanism  
Dash warning light  
Limit switch

### Step Operation

The SM600 manual cassette step is deployed by a damped gas spring which is activated by simply pushing the tread edge in a small distance with your foot and releasing. Once deployed, the tread is automatically locked in that position by a patented catch system which is activated by the weight of the person standing on the tread. The step is simply stowed by pushing the tread fully in by foot until the over-centre latch engages. There are no vulnerable release pedals required to operate the step.

### Weight

17kgs


### Options

Corner Tread Flashing Lights  
Under Tread Lights  
Vehicle Mounting Kit

### Warranty

12 months on site with option at time of purchase to increase for a further year subject to approved service and maintenance.  
Complies with all current legislative requirements.  
CE marked.

The Company has a policy of continual improvement and reserves the right to change the product specifications without notice

 44(0)1270-874982

Stayco is the registered trade mark and brand name of W.S.H.Taylor Engineering Ltd | Units 36 - 39 Building 10, Radway Industrial Park, Radway Green, Crewe, Cheshire, CW2 5PR | Tel: 44(0)1270-874982, Fax: 44(0)1270-886155